


T SSA

BIAXIALLY ORIENTED POLYPROPYLENE FILM

Bioriented polypropylene film, transparent, heat sealable from 221°F. It has anti-static and low coefficient of friction properties.

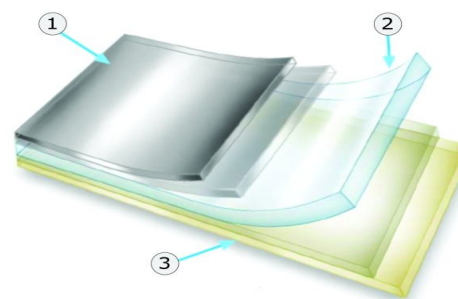

- 1 - SEALABLE SURFACE WITH HIGH SLIP
- 2 - PP HOMOPOLYMER
- 3 - SEALABLE SURFACE WITH HIGH SLIP

APPLICATION

Primary packaging of biscuits and wraps in general.

TYPICAL VALUES

Properties	Units	Typical Values			Method
		T20SSa	T25SSa	T30SSa	
THICKNESS	Gauge (micron)	80 (20,0)	100 (25,0)	120 (30,0)	ASTM D4321
BASIS WEIGHT	g/m ²	18,1	22,6	27,1	ASTM D4321
YIELD	in ² /lb (m ² /kg)	38900 (55,3)	31080 (44,2)	26900 (36,9)	ASTM D4321
GLOSS EXTERNAL	u.b.	85,0	85,0	85,0	ASTM 2457
HAZE	%	2,0	2,2	2,4	ASTM D1003
SEAL STRENGTH E/E	N/15mm	2,7	3,2	3,6	ASTM F88
SEALING INITIATION TEMPERATURE E/E	°F (°C)	221 (105)	221 (105)	221 (105)	ASTM F88
COF E/E	NA	0,25	0,25	0,25	ASTM D1894
SHRINKAGE MD	%	1,5	1,5	1,5	ASTM D1204
SHRINKAGE TD	%	1,0	1,0	1,0	ASTM D1204
ELONGATION MD	%	200,0	200,0	200,0	ASTM D - 882
ELONGATION TD	%	55,0	55,0	55,0	ASTM D - 882
TENSILE STRENGTH MD	Psi (Mpa)	21800 (150)	21800 (150)	21800 (150)	ASTM D - 882
TENSILE STRENGTH TD	Psi (Mpa)	43500 (300)	43500 (300)	43500 (300)	ASTM D - 882

Observations

1-The values described above may not be taken as the product specifications values. These values are based on the average or typical values generated at the time of production and should be considered as a reference only.

2- The films have their treatment at external side of the slit roll. Tecnoval is able to produce slit rolls with treatment at internal side under previously consulting to Commercial Area.

3- The technical information in this publication is based on our experience and is general. Users are suggested to conduct their own tests to determine suitability of these products for their own particular uses. The user is solely responsible for all determination regarding any use of the material or product and process in its interest.

Abbreviations: MD - Machine Direction; DT - Transversal Direction; E - External Side; NT - Non treated side.

TECNOVAL LAMINADOS PLÁSTICOS LTDA

Street Leonardo Costa Gonçalves, n 1100 - Parque Monte Verde
City: Itamonte - MG - Zip code:37466-000 - Phone.: + 55 35 3363 9200
Phone: + 55 12 2124 4400 / Fax: + 55 12 2124 4401

Review: 08/28/2017